

Rec'd PCT/PTO 26 JAN 2005

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
18 March 2004 (18.03.2004)


PCT

(10) International Publication Number  
WO 2004/021890 A1

- (51) International Patent Classification<sup>7</sup>: A61B 10/00, A61F 5/44
- (21) International Application Number: PCT/SE2003/001238
- (22) International Filing Date: 24 July 2003 (24.07.2003)
- (25) Filing Language: Swedish
- (26) Publication Language: English
- (30) Priority Data: 0202330-7 29 July 2002 (29.07.2002) SE
- (71) Applicants and  
(72) Inventors: PERLHAGEN, Markus [SE/SE]; Lindahls väg 9, S-260 83 Vejbystrand (SE). JÖNSSON, Roger [SE/SE]; Viktorrydbergsgatan 48-1, S-412 81 Göteborg (SE).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Declaration under Rule 4.17:  
— of inventorship (Rule 4.17(iv)) for US only

[Continued on next page]

(54) Title: DEVICE FOR COLLECTION OF UNCONTAMINATED URINE FROM CHILDREN

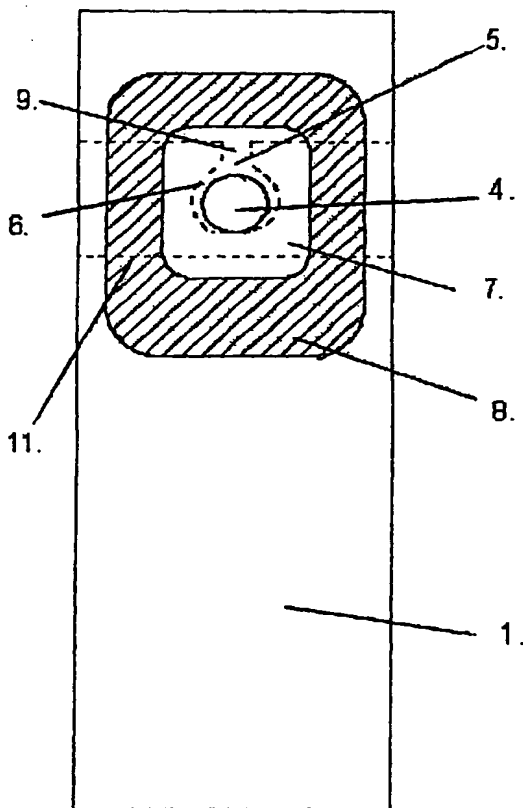

(57) Abstract: Disposable device for collection of uncontaminated urine samples from small children comprising a sterile container (1) with an inlet (4, 5) that eliminates direct contact between the wearers skin and the inside of the container (1) and which is initially closed by a delaying mechanism (9) consisting of e.g. a water soluble adhesive substance or material. The flow to the container (1) is initially hindered by said delaying mechanism (9) located in the inlet (5) of the container (1). This causes the initial portion of fluid, which may be contaminated with bacteria, to be absorbed by an absorbing layer (7) where after the inlet (5) is automatically opened so that the remaining fluid can reach the container (1) essentially uncontaminated.

WO 2004/021890 A1